




CLGL 342-SMD

| 4 Ft. SMD LED Retrofit Tube |

Construction

- 100% Recyclable tube
- Direct wire voltage, no ballast needed
- Poly carb or glass tube options safe for food prep area.
- Heat Wick® heat sink technology
- CREE SMD LED

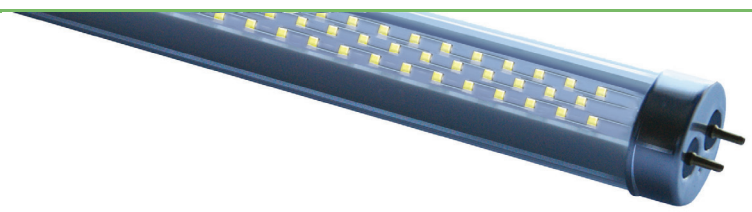

Operating Ranges


- Operating temperature range of -40 to 140°F
- Operating humidity range of 10 - 99%

CLGL Design


- 24 hr run hard design
- Engineered for use with standard T8 or T12 fixtures
- No hazardous substances. ROHS compliant.
- No mercury. No lead.
- New single pin & recessed double contact end caps *

Applications

- Fluorescent Replacements, Signage Lighting,
- Cove Lighting, Outdoor Lighting, Under Cabinet Lighting,
- Under Canopy Lighting, Parking Garages, Manufacturing and Inspection Lighting

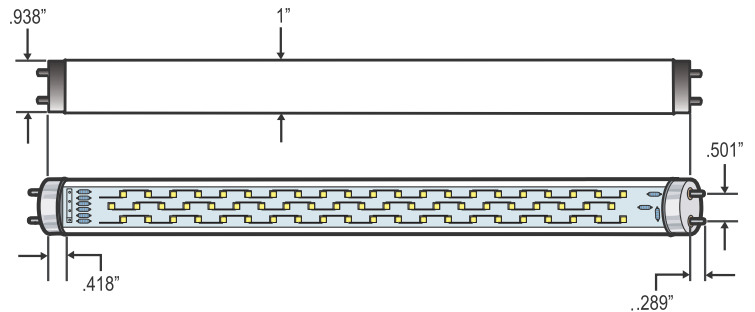

Output vs Wavelength

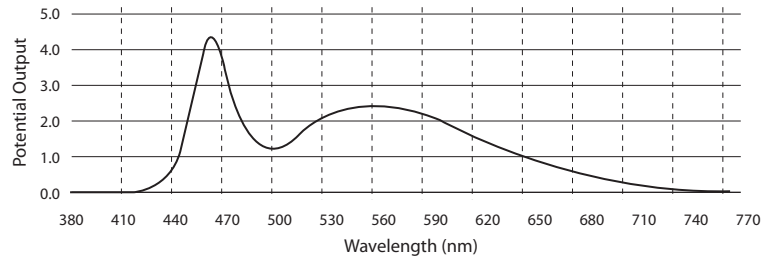

Model Details

Wattage	17
Lumens	1544
Approximate Weight	1 lbs. 1 oz.
Approximate Length	4 feet
Warranty	5 Year



Manufactured In The USA

Ordering Information

Please Fill Out Below

Model : CLGL 342-SMD

Lamp Quantity

Glass / Poly Carb

Glass (G), or Poly Carb (PC)

Voltage

12VDC, 90-277V, 347V
Custom Voltages Available

Color

3000-3500K, 4000-4500K (WW),
5000-5500K (NW) or
6000-6500K (CW)

Tube Type

Striped, Translucent or Clear